


nora wall base

Delivering a consistent height and toe dimension you can depend on and exuding a professional appearance that adds that final touch to your installation.

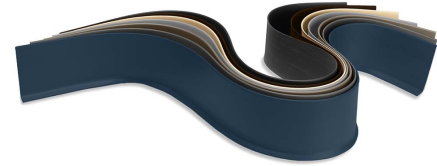

Product Data

Product: nora® wall base, Article 820

Description: Thermoplastic rubber with natural fillers and environmentally compatible color pigments that are free of toxic heavy metals like lead, cadmium, or mercury.

Material Size:

- Length: 120 feet (36.6 m)
- Height: 4 inches (102 mm)
- Thickness: 0.13 inches (3.2 mm)

Composition: Heterogeneous rubber compound

Colors: 20 Standard

Surface: Smooth

Technical Data

ASTM F1861 Standard Specification for Resilient Wall Base	Type TP: Thermoplastic Rubber
Flammability (E648/NFPA 253): ≥ 0.45 watts/sq. cm for Class 1 is required	NBSIR 75 950, 0.99
Smoke Density (ASTM E662/NFPA 258): < 450 is required	NBS, 258 (flaming) and 273 (non-flaming)
Bacteria Resistance (ASTM E2180/ASTM G21):	Resistant to bacteria, fungi, and micro-organism activity

Environmental Attributes

Carbon: All flooring products 3rd party verified carbon neutral throughout their entire life cycle through the Interface Carbon Neutral Floors™ program. Learn more at www.interface.com/carbonneutral.

Indoor Air Quality: GREENGUARD Gold Certified for low VOC emissions in compliance with CDPH 01350

Material Composition: Free of added formaldehyde, lead, and heavy metals

LEED Contribution: Meets VOC emissions requirements of LEED

Installation

Site Conditions: The installation area must be fully enclosed, weather tight, and climate controlled between 63°F and 75°F and 40% to 60% ambient relative humidity (RH) for at least 48 hours prior, during and 72 hours after installation.

Adhesive: Use standard wall base adhesive; nora does not manufacture base adhesive.

Unique Characteristics:

- Superb flexibility, scratch, and scuff resistance
- No color drifts and no dye lots
- UV resistance, color will not fade
- Ribbed back design for more secure adhesion
- Micro squared angled up-cut to minimize joint visibility

- Stable dimensions - height, toe, gauge, etc.
- Reinforced cove for greater durability in the toughest applications
- Long runs with minimal seams
- Outside corners must be heated and formed; do not gouge and bend
- Alternate sizes, styles, and formats available (0.13-inch thickness); minimum quantities and lead times apply (2.5 inch & 4 inch coved- or straight-base = 120 feet; 6 inch coved- or straight-base = 96 feet)
- Custom color matching possible; minimum quantities and lead times apply

For complete installation instructions refer to the nora Installation Instructions.

Care and Cleaning

Refer to the nora Maintenance Guidelines.

Wheel Types

No metal or hard plastic wheels, the shape of the contact surface of wheels must be flat with round edges. The shore hardness must be type A \leq 90.

Storage

nora flooring can be stored within a temperature range of -5°F (-21°C) to 120°F (49°C) under the following conditions: Pallets must remain intact with sheet goods standing on end, undamaged, not be stacked, be in a permanently dry environment, and with no direct sunlight. However, all adhesives and cold weld must remain at room temperature without freezing.

Warranty

Limited 5-year warranty. Refer to the nora Product Warranty - Americas.

Current nora Installation Instructions, Guide Specifications, Maintenance Guidelines, and Product Warranties, can be found at www.nora.com.

nora®, norament®, and noraplan® are trademarks owned by nora systems GmbH and registered in the United States, Canada, and other countries. All other trademarks are the property of their respective owners.

Updated: June 2022