

# nora nTx THE REVOLUTIONARY FAST INSTALLATION SYSTEM




## What is nora nTx?

nora<sup>®</sup> nTx<sup>™</sup> is a unique technology for professional installation of nora rubber floor coverings. Ingeniously simple - nora nTx floor coverings brings adhesive strength along from the factory.

The flooring is cleanly and safely installed in a few steps then immediately ready for use. Install over concrete or cement substrates typical in new construction or over existing floor coverings during renovations. Even high residual moisture in the subfloor is no problem for nora nTx.

#### **nora nTx** | the system configuration

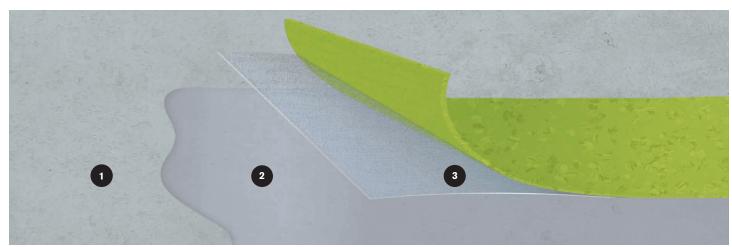

1 substrate 2 nora® nTx<sup>™</sup> 020 (bond enhancer) 3 nora® nTx floor covering with self-adhesive back

nora nTx includes a range of noraplan® and norament® standard floor coverings that come equipped with a self-adhesive layer. The glue in the adhesive layer is protected with film until installation and—like our floor coverings—is rubber-based and particularly health-friendly. Specially developed installation materials and tools for nora nTx provide functional safety and ensure the highest quality standards.

#### Install nora® nTx on any of these surfaces:



## Advantages at a glance

With nora nTx you can reduce installation time by up to 50% and can even carry out renovations during ongoing operations.

Installation problems belong to the past.





#### Reliable installation result

nora nTx reduces installation problems: and is backed by our 10-year bond warranty\*.



#### Immediate usability

Avoid drying and waiting times. Installation is possible during ongoing operations, and the floor can be used immediately after installation.



### High efficiency

The preparation of the floor and the installation of nora nTx require only a few work steps—for more space in less time.



#### For all types of subfloors

nora nTx is suitable for all common types of substrates—ideal also for problematic substrates and underfloor heating.



#### Use with residual moisture

Application in new builds also possible with increased residual moisture in the substrate.



## Covering-over-covering installation

In the case of renovations, installation is possible directly over existing floor coverings in just a few steps.

## Installing with nora nTx

This "covering over covering" installation example of noraplan nTx updated the Meyer + Harre Interior Design office in Berlin, Germany in a few steps—and was ready for work the next day.





Prepare the subfloor: sand, vacuum, and apply the nora nTx 020 primer.



Remove protective film and secure the floor covering.



Roll out the flooring and cut to fit.




Roll and perform maintenance. The floor can be used immediately - without waiting.



Photos: © Michael Reitz


## Buy with confidence

#### Technical service





#### Renowned nora quality





#### GREENGUARD Gold certified for low emissions





#### nora nTx installation is easy and fast

Roll out floor covering and cut to fit, remove protective film and adhere, then secure with a weighted roller - finished.

Compared to conventional wet bonding, it is possible to avoid work steps and error sources like the application of the adhesive and eliminate drying and waiting times.



## nora nTx standard program

(Special colors are available on request.)

#### norament® arago™ nTx™

3.5 mm tiles: Please call for lead times









#### norament castello™ nTx™ 3.5 mm tiles: Please call for lead times












norament® grano™ nTx™

3.5 mm tiles: Available through our QuickShip program







5306 Camphor




3.5 mm tiles: Please call for lead times



5301 White Fir









5320 Sassafras

5332 Geranium

norament arago nTx

**-** 5

Art. 3122

□ ~39.53" x 19.76" (1004 mm x 502 mm)



norament castello nTx

**~** 4

Art. 3177

□ ~39.53" x 39.53" (1004 mm x 1004 mm)





**♣** 16

Art. 3111

□ ~39.53" x 39.53" (1004 mm x 1004 mm) ₹~3.5 mm



5114 Circinus

**5121** Hydra

**5102** Grus



5115 Hercules





norament satura nTx

**♣** 10

Art. 3111

□ ~39.53" x 39.53" (1004 mm x 1004 mm)

~3.5 mm





**5122** Earth

norament® xp™ nTx™ 3.5 mm tiles: Please call for lead times

norament® satura™ nTx™

3.5 mm tiles: Please call for lead times





5116 Arcturus

**5110** Ara




norament® xp trac™ nTx™

3.5 mm tiles: Please call for lead times



5306 Camphor









norament xp nTx



Art. 3111

□ ~39.53" x 39.53" (1004 mm x 1004 mm)



noraplan xp trac nTx



Art. 3134

□ ~39.53" x 39.53" (1004 mm x 1004 mm)



noraplan environcare™ nTx™ 3.0 mm rolls: Available through our QuickShip program

















3.0 mm rolls: Please call for lead times



**7055** Champagne Toast

#### 2.0 mm rolls: Please call for lead times





7036 Clam Bake













7033 Tail Gating

7065 Pool Party

noraplan environcare nTx 3.0 mm

**~** 7

Art. 187C

~39.37' x 48" (12.0 m x 1.22 m)

₹~3.0 mm

noraplan environcare nTx 2.0 mm

**-** 9

Art. 181C

~49.21' x 48" (15.0 m x 1.22 m)

₹~2.0 mm

noraplan sentica™ nTx™ 3.0 mm rolls: Available through our QuickShip program








**6520** Snow Day

6521 Sunday Paper 6522 Expedition





6506 Cashmere











6517 Cut Grass **6529** Surf

noraplan sentica nTx 3.0 mm



Art. 186C

~39.37' x 48" (12.0 m x 1.22 m)

~3.0 mm

noraplan sentica nTx 2.0 mm

**-** 10

Art. 182C

~49.21' x 48" (15.0 m x 1.22 m)

₹ ~2.0 mm



#### Cover picture: © nora systems

Errors as well as misprints and changes reserved. No guarantee is given for the accuracy and completeness of the information. The product images in this document may differ from the original. This document is not a contractual offer and only serves to provide non-binding information.

The nora brand and all other registered trademarks used in this document are registered to nora systems GmbH or its affiliates or subsidiaries. Other labels used here are trademarks of their respective owners.

#### nora systems, Inc.

9 Northeastern Blvd. Salem, NH 03079 Toll free: 800-332-NORA

Phone: (603) 894-1021 Fax: (603) 894-6615 E-mail: info-us@nora.com

www.nora.com

