

norament 920

Excellence in Fire Protection

nora[®]
by Interface[®]



A preventative step for safety

Selecting the right fire-resistant materials before emergencies arise is crucial to protecting people and property. norament® 920 is an extremely fire-resistant rubber flooring to help limit the spread of flames and the buildup of smoke and gas. norament 920 is resistant to most oils and greases and maintains its functionality and appearance under extreme stress.

Ideal for egress pathways, norament 920 is available in both floor tiles and stair treads. Floor tiles are also IMO certified and U.S. Coast Guard approved for use in the international shipbuilding and offshore industry.





MAC Hamburg
BATTERY CHARGER

PROTECTIVE
FAN

BATTERY
COIL

PRODUCT NORAMENT 920 COLOR 0884 DUST GREY INSTALLED DIRECTIONAL

© Kari Palsila

norament[®] 920

Monochrome with a classic round pastille surface suitable for use in areas with special fire-protection requirements. Available in tiles and stair treads.


- Extra heavy traffic, including forklift
- Fifteen year limited wear warranty
- Increased safety due to high fire-retardant properties
- Ideal flooring for emergency exits and stairways
- For use in egress areas above 75 feet according to International Building Code (IBC)
- Passes EN/ISO 26987 for oil & grease resistance
- Meets Class A (ASTM E84 Tunnel Test) with a flame spread rate of 15 and smoke development of 300
- IMO certified floor covering

norament 920

Art. 0354



~39.61" x 39.61" (1006 mm x 1006 mm)



Product Construction	Homogeneous Rubber Tile
Class / ASTM F1344	Type IA and Grade 1
Surface Type	Round Pastille
Indoor Air Quality	GREENGUARD Gold
	CDPH 01350 Compliant
Full Life Cycle Carbon Emissions	Carbon Neutral Floors™
LEED v4	Contributes to IEQ credits

Multiple installation options, including high-moisture solutions.

View details and the full product specification at nora.com.

Installation Method




DIRECTIONAL

norament[®] 920 stairtreads



Art. 465 - width ~50.59" (1285 mm)

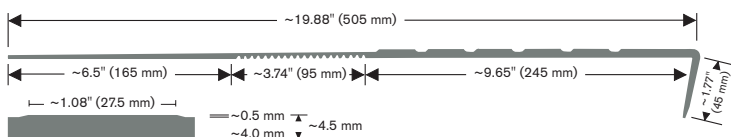



0702 BLACK



0749 STONE GREY



0884 DUST GREY



0862 AZURE BLUE



nora visually impaired strips


norament stairtreads and nora stair nosings can be equipped with a range of nora visually impaired strips to guide users or mark the edge of stairs in areas with safety or accessibility concerns. Inserts are offered in textured or smooth surfaces and high-contrast colors. We also offer a photoluminescent option that is NFPA 101: Life Safety Code®, IBC, IFC, and UL 1994 compliant.



SAFETY YELLOW



CORAL RED



BOARDWALK BLUE




BLACK



NITE GLOW




OCEAN GREY



0122



0895

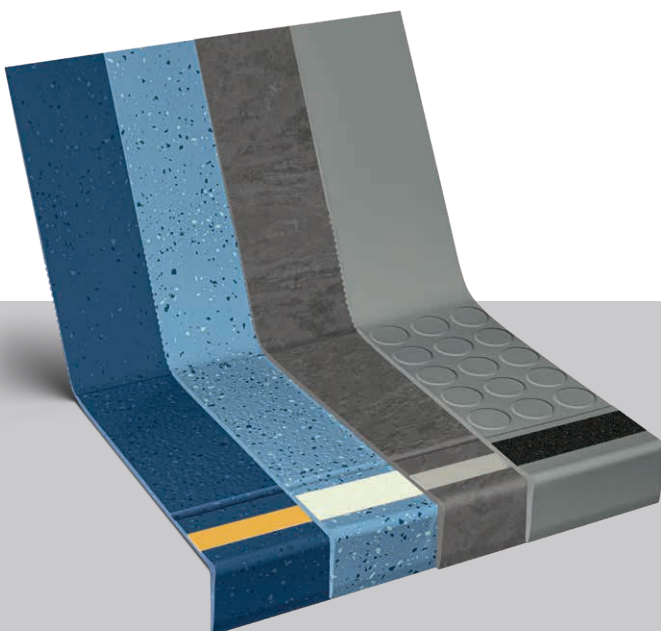

To ensure safety and performance, nora epoxy stair filler is used under the nosing of stairtreads with nora visually impaired strips at installation.

nora stair accessories

nora stepfix 240

nora stepfix 240 is an innovative and cost-effective adhesive tape suitable for new builds and renovation projects. Specifically designed for nora stair treads, nora stepfix 240 makes installation 3-5 times faster than conventional installation methods, and the process is odorless, clean, and easy.

You can dry-fit the tread right on the covered adhesive tape, and stairs can be walked on immediately after installation. And nora stepfix 240 is GREENGUARD Gold certified for low VOC emissions, helping to improve indoor air quality.



Art. 907

Dimension of rolls: ~9.45" width x 164' length (240 mm x 50 m) = ~129 square feet (12 m²)

nora epoxy stair filler

A solvent-free, non-flammable, high-performance epoxy that sets to a hard, permanent bond. Use on stairs with greater than 1/4" radius or damaged edges to provide support under the stair tread nosing. Required for nora visually impaired strips.




Art. 500875

- 13.5 oz dual cartridge applicator with special mixer application tip
- Two cartridge caulking gun required
- Coverage: ~40 linear feet with a .25" bead

nora metal repair stair angle

Prep rounded, wavy, damaged or bowed steps with the nora metal repair stair angle prior to installing nora stairwell products.



Art. 6637

Piece Length: ~39.37" (1.0 m)

- Screws: middle of hole to middle of hole ~2.5" (63.5 mm)

On stairs with round nosing, nora metal repair stair angle and/or nora epoxy stair filler must be used to fill the void.



Why nora® rubber flooring?



Reduced Maintenance

Little more than water needed - no finishes, coatings or harsh chemicals necessary.



Quiet Acoustical Performance

Attenuate noise pollution.



Durable Surface

Withstand extreme stress from heavy rolling loads and wheeled traffic.



Ergonomic Design

Add comfort underfoot, reducing foot and leg pain.



Superior Slip Resistance

Help to create safer spaces.



Supports Infection Control

Disinfect completely due to a dense, non-porous surface.



Carbon Neutral Floors™

Third party verified carbon neutral throughout its entire life cycle as part of Interface's Carbon Neutral Floors program. Learn more at interface.com/carbonneutral



GREENGUARD Gold

Certified low VOC emissions.

Integrated system

nora and Interface cover every area of your building – all from a single source. Create harmonious, space-specific design with our system of soft and resilient floor coverings, including special floorings, stairtreads and accessories.

Outstanding service

From design to post-installation, we have the experts to support your project at every step and can even be a valued resource for your organization's sustainability mission.

For additional information regarding usage in recommended applications, contact us or visit nora.com.

ORDER SAMPLES

Online at www.nora.com
Call 1.800.332.NORA
Email your sales rep or customer support specialist

BROWSE NORA.COM

- Design your floor with Interior Design Studio
- Find technical and environmental documents
- Access BIM/Revit Files

Product warranty

We will be happy to supply specific test results on all nora systems, Inc. products.

nora® by Interface®

Product Warranty – Americas (Excerpt)

nora systems, Inc. (nora) warrants the following nora® brand products (collectively, the "Warranted nora Brand Flooring Products") as set forth below: norament® and noraplan® rubber flooring, norament rubber stairtread (excluding visually impaired strips), accessories (excluding visually impaired strips), nora® nTx™ 020 bond enhancer and adhesives, and the conductivity of its Electrostatic Dissipative ("ESD") flooring system (norament ed and noraplan ed flooring and adhesive).

This limited warranty and the applicable Installation Instructions and Maintenance Guidelines are subject to change at nora's discretion and without notice. Please contact nora or visit the nora.com website for the latest versions. For additional information regarding usage in recommended applications, please refer to www.nora.com or call 1-800-332-NORA. Warranty periods commence on the date of invoice of the product to the original end-use customer.



Printed on 50% post consumer waste (PCW)
fiber manufactured using wind power.

Errors as well as misprints and changes reserved. No guarantee is given for the accuracy and completeness of the information. The product images in this document may differ from the original. This document is not a contractual offer and only serves to provide non-binding information.

The nora brand and all other registered trademarks used in this document are registered to nora systems GmbH or its affiliates or subsidiaries. Other labels used here are trademarks of their respective owners.

nora systems, Inc.
9 Northeastern Blvd.
Salem, NH 03079
T: 800.332.NORA
T: 603.894.1021
info-us@nora.com
www.nora.com